


Steel quality
 Steel: s235/s355
 Bolts: 8.8 FZV
 U-bolts: s355 FZV


Performance

Max vertical load from equipment per pole: 260kg
 Max horizontal load from equipment per pole: 5,0kN
 Max geometric equipment area per pole: 2,5m²
 Max installation height: 70meter
 Terrain classification: TC1
 Reference wind speed: 27m/s
 M10 nut tightening torque: 30Nm
 M10 2nd nut tightening torque: 47Nm

Installation and maintenance guides are available on our website www.telecomsteel.com

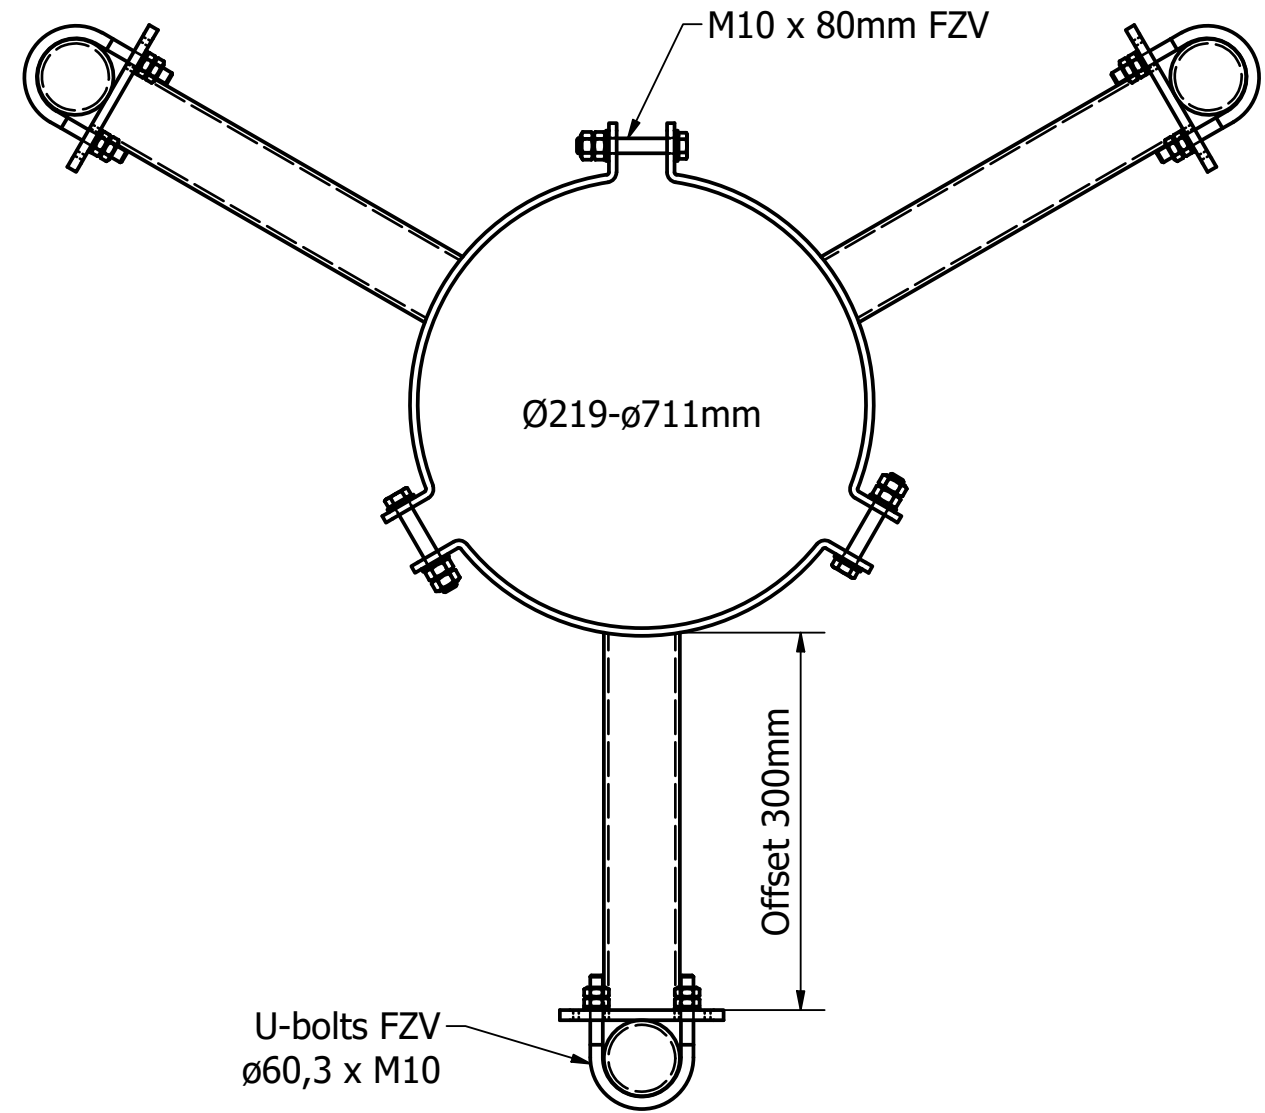

Size	Item numbers			
	2500mm	3000mm	3500mm	4000mm
Ø219mm	41233-E	41243-E	41253-E	41263-E
Ø254mm	41303-E	41313-E	41323-E	41333-E
Ø273mm	41373-E	41383-E	41393-E	41403-E
Ø324mm	41443-E	41453-E	41463-E	41473-E
Ø356mm	41513-E	41523-E	41533-E	41543-E
Ø458mm	41583-E	41593-E	41603-E	41613-E
Ø558mm	41653-E	41663-E	41673-E	41683-E
Ø660mm	41723-E	41733-E	41743-E	41753-E
Ø711mm	41793-E	41803-E	41813-E	41823-E

Designed by ABP	Checked by	Approved by	Date	Date 17-09-2024
 TELECOMSTEEL DANISH DESIGN & QUALITY			AO ø219-ø711mm 300mm_extra bracket	
			Revision B	Sheet 1 / 1